

DuraShiner® CFBR

The DuraShiner® CFBR from Belanger is the only automatic tire shiner specifically designed for in-bay wash applications. It's built to work for in-bay operators, delivering both immediate new revenue, and sustainable repeat business. The DuraShiner® CFBR overcomes even extreme vehicle orientation issues, with Floating Head Technology™ that auto-aligns the applicator brush, "bringing the shine to the tire", every time.

Competitors' so-called 'in-bay' tire shiners force customers between two fixed guide rails, rendering it impossible for the shiner to adjust to the various vehicle angles encountered in a drive-through wash bay. The DuraShiner® CFBR is different. Instead of using guiderails, the DuraShiner® CFBR adapts to the customers' driving habits, providing superior results to competitors' fixed-position in-bay tire shiners.

The DuraShiner CFBR brush fill is designed for longer wear and less tear. The soft-tipped nylon brush easily conforms and accommodates all tire sizes, including the most rugged truck tires on the road today, to deliver the perfect shine every time.

We now offer the optional 108" brush length for complete tire shine coverage on the largest of the truck tires on the road today.


With the NEW insta-Chem controls you will also save on chemical consumption and costs. The operator programmable Insta-Chem controls allows you to delivery chemical "on demand" to the tire shine brush as the vehicle is approaching for on-time application and complete wheel coverage with every wash. With no chemical waste between tire shine services your profit stays where it belongs-in your pocket!

Available in electric; our brush is compatible with water and solvent based tire dressings.





DuraShiner® CFBR

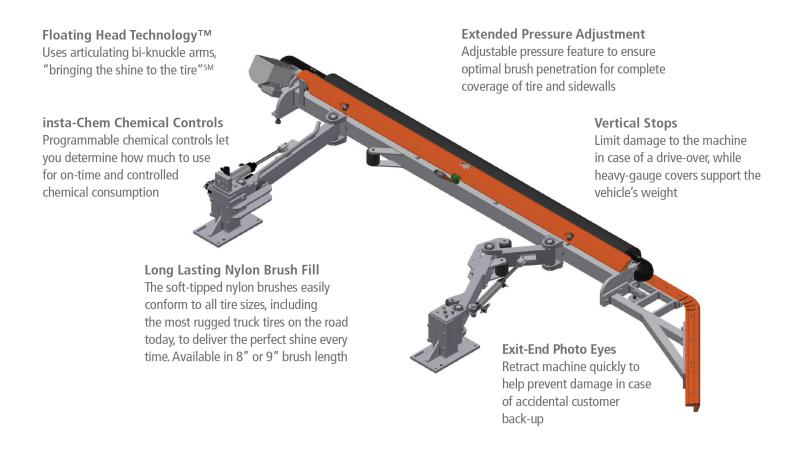

REQUIREMENTS

Physical Examples	8'	9'	
Component Height	1'	1'	
Minimum Bay Width Required	14'	14'	
Minimum Bay Length Required	16' 6"	17' 6"	

Utility Examples

Electrical (1) 120 VAC constant from Controller

(1) Exit Function 120 VAC from Controller or optional signal from POS

Pneumatic 1/4" airline @ 90 PSI minimum, 120 PSI maximum

Belanger 1001 Doheny Court P.O. Box 5470 Northville, MI 48167-5470 USA

©2023 Belanger Inc. Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.



